INDUSTRIAL ENCLOSURES **BY TRICEL**







IP43 RATED COMMERCIAL ELECTRIC METER ENCLOSURE 500 x 750 x 300MM COMPLIES TO IEC 62208:2011 STOCK CODE: EB0028



INDUSTRIAL

ENCLOSURES

TECHNICAL

RATED COMMERCIAL TRIC METER ENCLOSURE

500 X 750 X 300MM

Suitable for electrical and commercial installations.

Complies with the international standard for empty enclosures as applied to low-voltage switchgear and control gear assemblies (IEC 62208:2011).



Example: Kiosk to concrete

DIMENSIONS

500mm high x 750mm wide x 300mm deep The overall height of this box is 563mm The opening size is 468mm x 428mm*.

KEY FEATURES

- · Electromagnetic compatibility, ideal for protecting internal electronic communication.
- Suitable for low-voltage switchgear and control gear assemblies, meters, compressors, etc.
- · Will not corrode, weather resistant with an IP43 rating.
- High impact resistance up to 20 Kilojoules (IK10).
- Double insulation and electrically nonconductive (1000V).
- Triple lock system supported by noncorrosive vertical bars.
- Door hinges on right, 180° opening.
- · Easily cleaned and can be painted.

SPECIFICATIONS

- Constructed from Glass Reinforced Polymer (GRP).
- Supplied with hinges, lock and key.
- Polyester back mounting plate (optional) available.
- Supplied in light grey colour (Ral 7035).
- Suitable for use in temperatures ranging from -30°C to +70°C.
- · Made from non-hygroscopic material ensuring minimum water
- · Constructed from halogen-free and selfextinguishing material.
- · UV protected.



* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

TRICEL UK

TRICEL IRL

Tel: +44 (0)1453 791616 Tel: +353 (0)64 663 2421

Registered number 02868648 Registered number IE 075014


RATED COMMERCIAL TRIC METER ENCLOSURE

500 X 750 X 300MM


INDUSTRIAL ENCLOSURES

40t **TECHNICAL EXPERIENCE**

ASSEMBLY INSTRUCTIONS

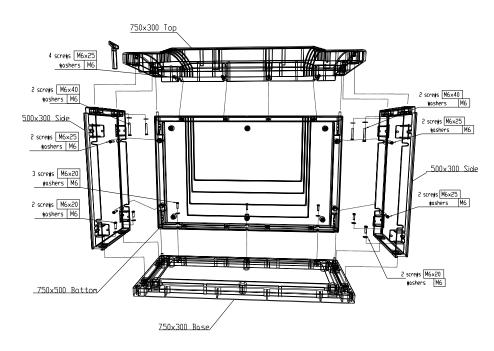

DOOR ASSEMBLY

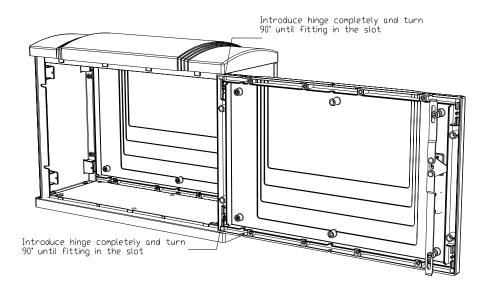



* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.