

# METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER



## GRP Overbox Electric Recessed Mark 2

GRP architrave overbox to suit damaged recessed meter boxes. This GRP Overbox (Door frame kit) comes with a tapered back to fit standard UK electricity meter boxes..

**COMPLIANT TO BS 8567 : 2012**

STOCK CODE: 105140



**TRICEL**  
GENERATIONS OF INNOVATION


STOCK CODE:  
105140

# GRP OVERBOX ELECTRIC


GRP architrave overbox to suit damaged recessed meter boxes.

## METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER

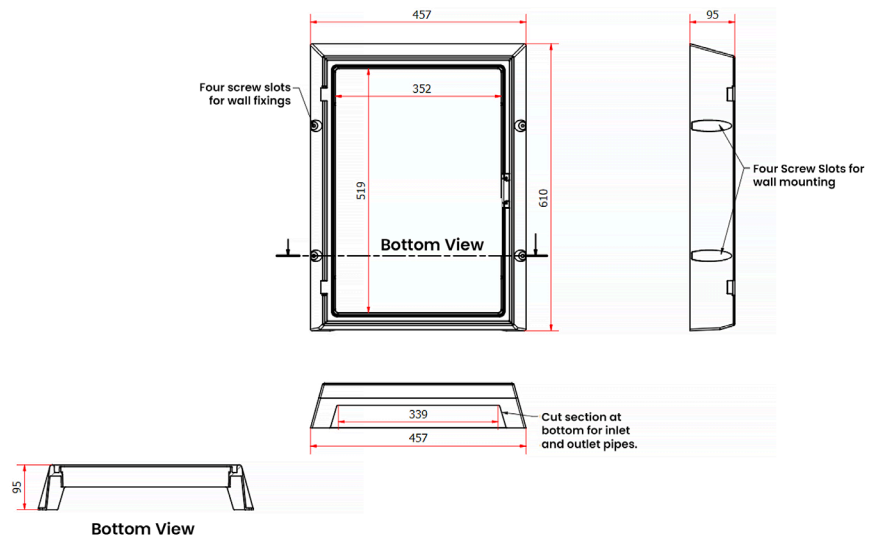

### DIMENSIONS

610mm high x 457mm wide x 95mm deep.

Internal dimensions = 519mm high x 352mm wide\*

### SPECIFICATION & KEY FEATURES

- GRP overbox, repair solution for damaged Electric recessed meter boxes.
- Meets the requirements of British Standard BS8567 : 2012.
- Works with Smart Meters (no interference).
- Constructed from SMC / GRP – Glass Reinforced Polymer.
- Will not corrode, weather resistant.
- Easily cleaned and can be painted.
- Hinges on right.
- Suitable for buildings with red bricks.

\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. – Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 1453 791616 | Email: [constructionsales@tricel.co.uk](mailto:constructionsales@tricel.co.uk) | [www.tricel.co.uk](http://www.tricel.co.uk)

STOCK CODE:  
105140

# GRP OVERBOX ELECTRIC

GRP architrave overbox to suit damaged recessed meter boxes.

# METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER

**Step 1:** Ensure that the GRP Overbox that you want to fit is the correct one for the box on the wall.

The existing box on the wall should be approximately:

- Height = 595mm to 600mm
- Width = 410mm to 412mm
- Depth (outside of box to wall) = 70mm to 75mm



**Step 2:** Remove the existing door, clean the box architrave and inspect for damage. Any damage (holes or cracks) should be filled using a 4-hour fire-retardant silicone to ensure that water doesn't enter the cabinet.

**Step 3:** After unpacking the new GRP Overbox, remove the door from the damaged meter box. This can be done by depressing the brass insert hinge with a narrow screwdriver.



**Step 4:** On the wall, position the GRP Overbox over the damaged box. Make sure the box fits properly (incorrect wall installation may hinder this).



**Step 5:** Mark the holes on the wall from the Overbox fitting holes:



**Step 6:** Drill holes using M6 Drill bit at a depth of 30mm



**TRICEL**  
GENERATIONS OF INNOVATION

\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 1453 791616 | Email: [constructionsales@tricel.co.uk](mailto:constructionsales@tricel.co.uk) | [www.tricel.co.uk](http://www.tricel.co.uk)

105140-1262199/0-Jan2024


STOCK CODE:  
105140

# GRP OVERBOX ELECTRIC

GRP architrave overbox to suit damaged recessed meter boxes.

## METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER



STEP 7

Step 7: Drill holes using M6 Drill bit at a depth of 30mm



STEP 8

Step 8: Align the Overbox to the holes drilled on wall, and fix to the wall using supplied M5x30mm screws.



STEP 9

Step 9: Close the door and test the fit.



STEP 10

Step 10: You may need to seal the architrave to the wall to fill in gaps, we only recommend FR200 four hour fire-retardant silicone.

## ASSOCIATED PRODUCTS



SPARE KEY  
(170001)



4-HOUR FIRE RETARDANT SILICONE  
(106164)

\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 1453 791616 | Email: [constructionsales@tricel.co.uk](mailto:constructionsales@tricel.co.uk) | [www.tricel.co.uk](http://www.tricel.co.uk)