

METER BOXES

BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER



GRP ARCHITRAVE OVERBOX

SUITABLE FOR TRICEL/MEDIUM PERMALI AND WAVIN BOXES

STOCK CODE: EB0025



TRICEL


CONSTRUCTION

METER BOXES

BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER

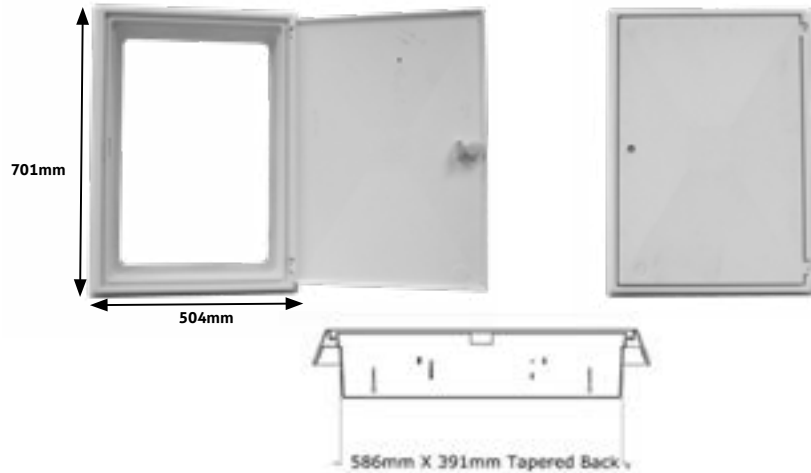

DIMENSIONS

701mm high x 504mm wide.

The GRP Archtrave overbox contains the following:

1 x frame, 1 x door, 1 x 310mm FS703 silicone, 1 x short reach key,
4 x 3/4" screws & 1 x carton

INSTRUCTIONS

1. Clean the inside of the frame of existing meter box with a cloth. **See figure 1.**
2. Apply Silicon around the frame of the GRP Archtrave Overbox. Put the nozzle of the cartridge touching the archtrave edge. Apply a thick bead of silicon. **See Figure 2.**
3. Apply a thick bead of Silicon in the top and bottom corners. **See Figure 3.**
4. Slide the GRP Archtrave Overbox in place into the existing meter box (Check that the GRP Archtrave Overbox is in its correct orientation). **See Figure 4.**
5. Drill 4 holes with a diameter 3.5mm drill bit in the moulded slots. **See Figure 5.**
6. Secure the GRP Archtrave Overbox in place with self-tapping screws. **See Figure 6.**
7. Attach the meter box door to the GRP Archtrave Overbox and close. **See Figure 7.**



* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 1453 791616 | Email: constructionales@tricel.co.uk | www.tricel.co.uk