

METER BOXES

BY TRICEL

40+ YEARS
TECHNICAL
EXPERIENCE



Works with
Tricel and
Mitras Mark 2
Recessed Gas
Meter Boxes

Tricel SMC Gas Overbox (GRP Mark 2 Overbox)

GRP Overbox and Door to suit damaged recessed meter boxes. This GRP Overbox (Door frame kit) comes with a tapered back to fit standard Irish Gas meter boxes.

COMPLIANT GAS NETWORKS IRELAND STANDARD AM-SP 055
STOCK CODE: 105097



TRICEL
GENERATIONS OF INNOVATION


STOCK CODE:
105097

Tricel SMC Gas Overbox (GRP Mark 2 Overbox)

COMPLIANT GAS NETWORKS IRELAND STANDARD AM-SP 055

**METER
BOXES**
BY TRICEL

40+ YEARS
TECHNICAL
EXPERIENCE

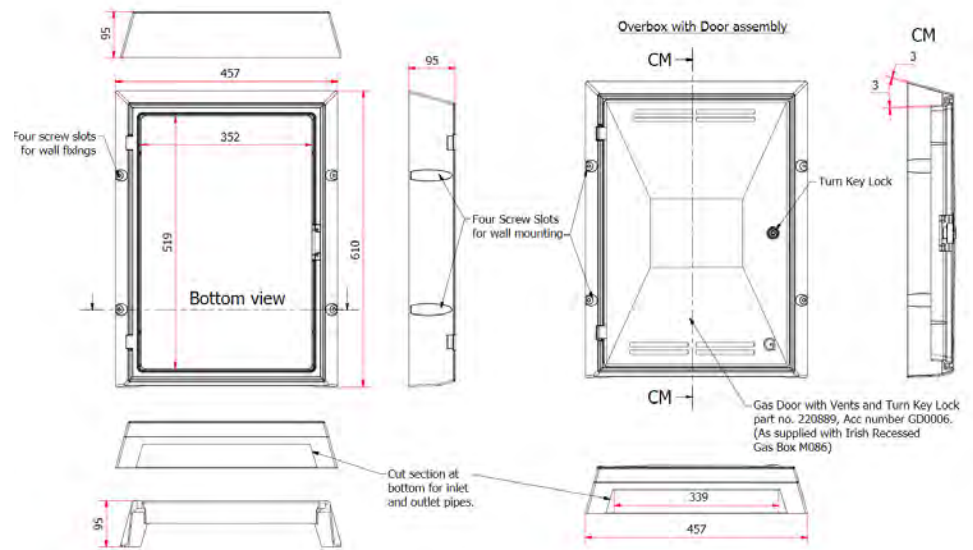

Dimensions of GRP GAS Overbox

610mm high x 457mm wide x 95mm deep.
Internal dimensions = 519mm high x 352mm wide*

SPECIFICATION & KEY FEATURES

- GRP Overbox, repair solution for damaged Gas Recessed Meter Boxes.
- Compliant to GNI standards AM-SP-055 (2020).
- Compatible with all Ireland and Northern Ireland Gas Recessed Meter Boxes.
- Constructed from SMC / GRP – Glass Reinforced Polymer.
- Will not corrode, weather resistant.
- Easily cleaned.
- Hinges on left.
- Suitable for buildings with red bricks.

INSTALLATION

Step 1: Ensure that the GRP Overbox that you want to fit is the correct one for the box on the wall.

The Damaged Box on the wall should be approximately:

- Height = 595mm to 600mm
- Width = 410mm to 412mm
- Depth (outside of box to wall) = 70mm to 75mm



* Approximate dimensions.
In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

TRICEL UK
Tel: +44 (0)1453 791616
Registered number 02868648

TRICEL IRL
Tel: +353 (0)64 663 2421
Registered number IE 075014


TRICEL
GENERATIONS OF INNOVATION

105097-1209822/1-MAR2025

STOCK CODE:
105097

Tricel SMC Gas Overbox (GRP Mark 2 Overbox)

COMPLIANT GAS NETWORKS IRELAND STANDARD AM-SP 055

**METER
BOXES**
BY TRICEL

40+ YEARS
TECHNICAL
EXPERIENCE

Step 2: Remove the existing door, clean the box architrave and inspect for damage. Any damage (holes or cracks) should be filled using a 4-hour Fire Retardant Silicone (Only ESB Approved Silicone should be used, we recommend 106164 – FR200 Silicone which can be bought separately). This will ensure that water does not enter the cabinet.



STEP 2

Step 3: After unpacking the GRP Overbox, remove the door. This can be done by depressing the brass insert hinge with a narrow screwdriver.



STEP 4




STEP 5



Step 4: Place the GRP Overbox over the damaged box on the wall. Ensure that you have a good fit (incorrect installation of the box on the wall may hinder this).

Step 5: Mark the holes on the wall from the overbox fitting holes.



STEP 6

Step 6: Drill holes using M6 Drill bit at a depth of 30mm.



STEP 7

Step 7: Insert supplied wall plugs into the wall.

* Approximate dimensions.
In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

TRICEL UK
Tel: +44 (0)1453 791616
Registered number 02868648

TRICEL IRL
Tel: +353 (0)64 663 2421
Registered number IE 075014


TRICEL
GENERATIONS OF INNOVATION

105097-1209822/1-MAR2025

STOCK CODE:
105097

Tricel SMC Gas Overbox (GRP Mark 2 Overbox)

COMPLIANT GAS NETWORKS IRELAND STANDARD AM-SP 055

**METER
BOXES**
BY TRICEL

40+
YEARS
TECHNICAL
EXPERIENCE



Step 8: Align the overbox to the holes drilled on wall, and fix to the wall using supplied M5x30mm screws.

Step 9: Close the door and test the fit.

Step 10: You may need to seal the architrave to the wall to fill in gaps. Only FR200 4-Hour Fire Retardant Silicone is recommended.

ASSOCIATED PRODUCTS



REPLACEMENT METAL KEY FOR ELECTRIC
AND GAS METER BOXES
(221439)



4-HOUR FIRE RETARDANT SILICONE
(106164)



* Approximate dimensions.
In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

TRICEL UK
Tel: +44 (0)1453 791616
Registered number 02868648

TRICEL IRL
Tel: +353 (0)64 663 2421
Registered number IE 075014