

# METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER



## GRP ELECTRIC ARCHITRAVE OVERBOX

SUITABLE FOR TRICEL/MEDIUM PERMALI  
AND WAVIN BOXES

STOCK CODE: EB0025




**TRICEL**  
GENERATIONS OF INNOVATION

# METER BOXES

BY TRICEL



UK'S LEADING  
DESIGNER & MANUFACTURER

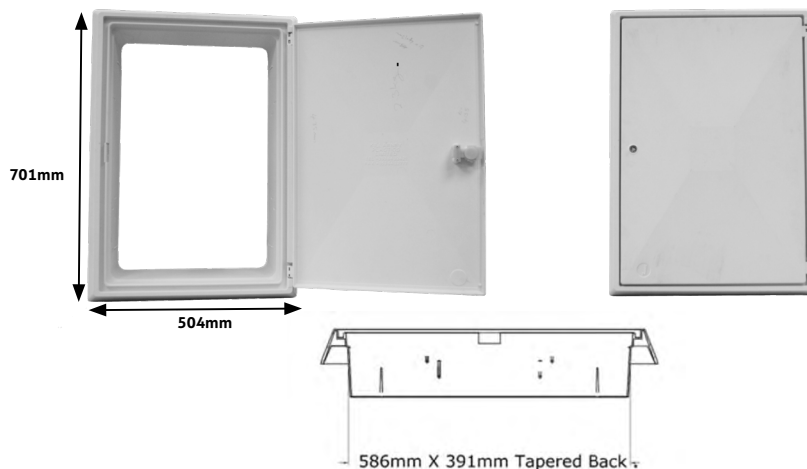

## DIMENSIONS

701mm high x 504mm wide.

The GRP Archtrave overbox contains the following:

1 x frame, 1 x door, 1 x 310mm Silicone, 1 x short reach key,  
4 x 3/4" screws & 1 x carton

## INSTRUCTIONS

1. Clean the inside of the frame of existing meter box with a cloth. **See fig 1.**
2. Apply Silicone around the frame of the GRP Archtrave Overbox. Put the nozzle of the cartridge touching the archtrave edge. Apply a thick bead of silicone. **See fig 2.**
3. Apply a thick bead of Silicone in the top and bottom corners. **See fig 3.**
4. Slide the GRP Archtrave Overbox in place into the existing meter box (Check that the GRP Archtrave Overbox is in its correct orientation). **See fig 4.**
5. Drill 4 holes with a diameter 3.5mm drill bit in the moulded slots. **See fig 5.**
6. Secure the GRP Archtrave Overbox in place with self-tapping screws. **See fig 6.**
7. Attach the meter box door to the GRP Archtrave Overbox and close. **See fig 7**



\* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.

Tel: +44 1453 791616 | Email: [constructionsales@tricel.co.uk](mailto:constructionsales@tricel.co.uk) | [www.tricel.co.uk](http://www.tricel.co.uk)