



Suitable for slow moving vehicles up to 5 tonne gross laden vehicle weight (15kN (1.5. tonne) pneumatic wheel loads).

Pedestrian precincts, light commercial delivery or parking areas (pneumatic tyres); domestic driveways, trolley parks and hospital wards.


The non-locking galvanised mild steel cover features an integral lifting handle.

The polypropylene frame includes a moulded grouting flange.

KEY FEATURES

- Light duty (FACTA AA)
- 450 x 450 mm clear opening
- Integrated lifting handle
- Moulded grouting flange
- Non-locking
- Mild steel solid cover
- Polypropylene frame
- Galvanised to BS EN 1461:2013

DIMENSIONS mm

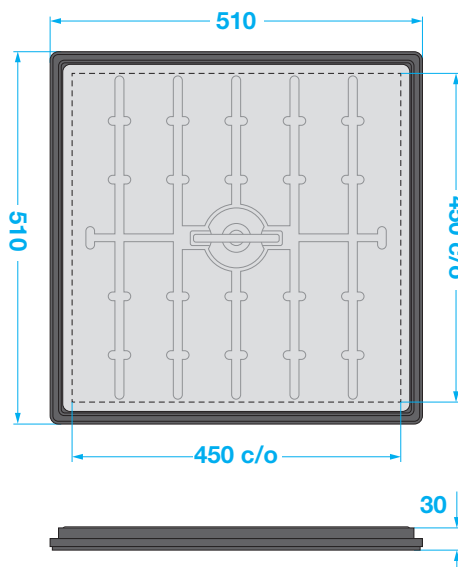

TECHNICAL SPECIFICATIONS

Mild steel	EN 10346 2015 DD11
Galvanising	BS EN 1461:2013
Polypropylene grade	AP9
Weight	5 kg
Load test data	12.5 kN for 30 s
FACTA clauses	7.0, 7.2, 7.2.1, 7.2.3