


Suitable for internal and external areas which can only be used by pedestrians or cycles, such as toilets, changing rooms, footways and cycle tracks.

Comprises mild steel inlay cover, galvanised to BS EN ISO 1461:2009, and a polypropylene frame with moulded grouting flange.

It is locked by four countersunk steel screws.

DIMENSIONS mm

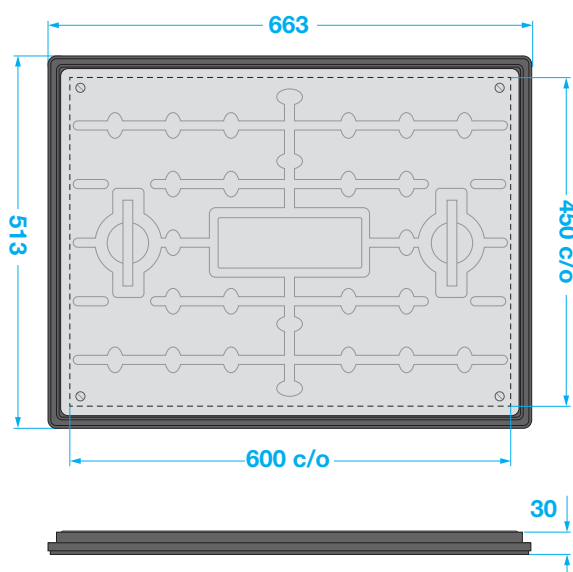

KEY FEATURES

- Pedestrian duty (FACTA A)
- Mild steel cover to EN 10346 2015 DD11
- Galvanised to BS EN 1461:2018
- Polypropylene frame (Grade AP9)
- Locking, M8 x 20 countersunk screws
- Integrated lifting handles
- Moulded grouting flange
- Single seal gasket
- Assembly weight 6.5 kg