






## SYSTEM OVERVIEW



One free-standing automatic pump



Access cover, solid top, locking, galvanised steel, FACTA AA



A fully automatic wastewater pumping system suitable for pumping surface and/or groundwater to a higher level when gravity drainage is not possible and/or economical to install.

The system provides up to 165 litre storage capacity depending inlet depth. It can accept waste from car parks, car washes, floor areas, down pipes, cavity membrane systems or similar.

The system consists of a polyethylene tank, an automatic wastewater submersible pump and a solid top, locking, galvanised steel access cover, FACTA AA (#106988).

It discharges to solvent welded 1 1/4" Class E PVC. Optional discharge reducer kits can increase external discharge diameter to 1 1/2" or 2" to reduce friction loss.

It is easy to install as inlets can be positioned to your site's requirements. Inlet information to be supplied at time of order, or can be drilled on site.

**For groundwater and surface water applications where inflow cannot be controlled, twin pump systems complete with a high level alarm and battery backup system should be used, in accordance with BS 8102:2022 and PCA Guidelines. High level alarms and battery backup systems can be purchased to your specification.**

## KEY FEATURES

- Vortex impellor for high flow rates
- Up to 165 litres storage capacity
- Compact chamber for limited space installations
- Ideal for an extension, outbuilding, basement or similar
- 450 mm x 450 mm clear opening
- Variable inlet positions to suit site
- A range of battery backup systems are available
- A range of alarms and remote alerts are available
- Quick and simple to install

## WASTE TYPE



Grey Ground Surface Storm

**This system is not suitable for receiving foul waste. Contact our Sales Team for advice on a suitable foul water packaged pumping stations for your property.**

## RECOMMENDED ACCESSORIES


### AquaSafe Alarm Sump



High level alarm alert  
HLA recorded alert  
Service due alert  
Volt-free contacts  
Alarm battery backup

106993

### Inlay access cover 450 x 450 mm



106986


### Additional inlet

110 mm 50 mm




107034 107035

### EXAMPLE INSTALLATION

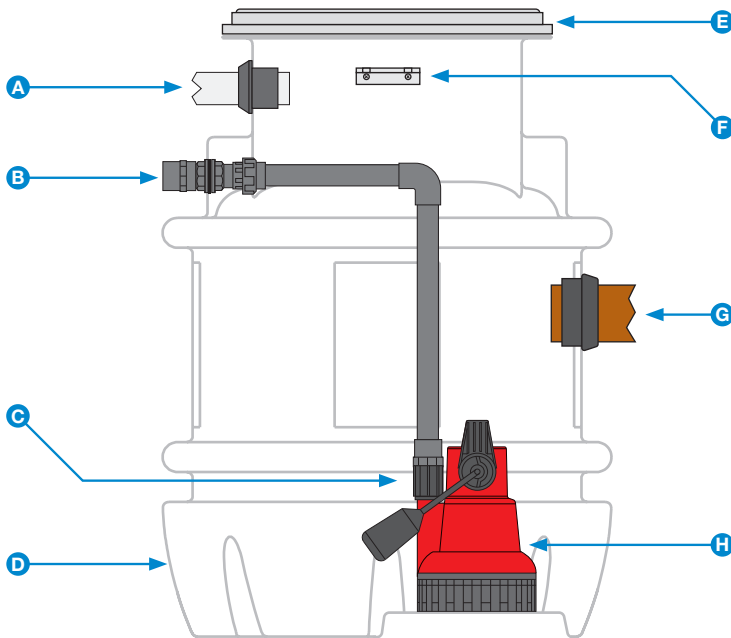

- A 50 mm cable duct positioned to site requirements.
- B Plain female discharge for solvent welding to 1½" Class E PVC.
- C Non-return valve.
- D Structurally-reinforced virgin tank-grade polyethylene chamber.
- E Galvanised steel, solid top, locking, access cover, FACTA AA.
- F Float bracket for optional high level alarm mini float.
- G 110 mm inlet positioned to site requirements (additional inlets available).
- H 240 V automatic submersible pump.

### CHAMBER DIMENSIONS

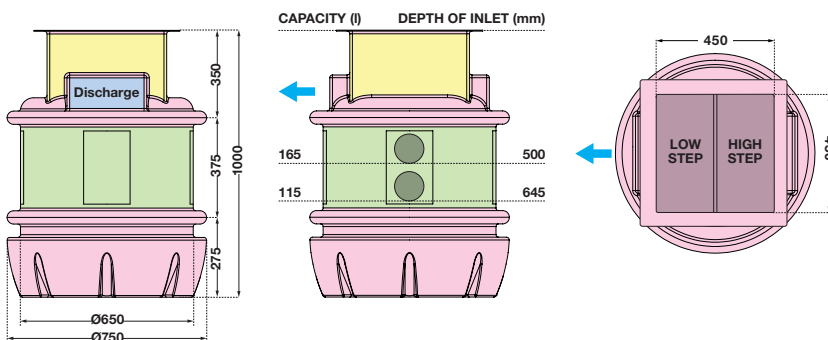


#### Permitted connection positions

Capacities indicative from lowest inlet invert.

Discharge only	Inlet location allowed	Cable ducts and vents only	No drilling allowed
----------------	------------------------	----------------------------	---------------------

### PUMP SPECIFICATIONS

Number of pumps	One
Impellor type	Vortex
Control	Automatic
Power supply	230 VAC
Rated current	1.9 A
Motor rating (P2)	180 W
Discharge size	1½"
Free passage	10 mm
Max. vertical output	6.8 m
Max. flow rate	2.9 l/s
Max liquid temp.	< 40 °C
Cable length	5 m
Weight	5.2 kg

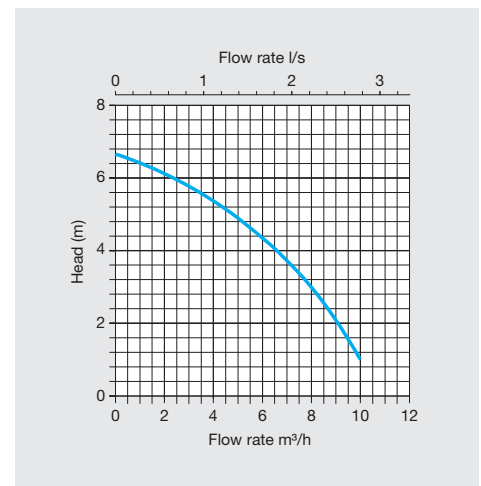

### CHAMBER SPECIFICATIONS

Internal pipework	1½" OD Class E PVC
Discharge pipework	1½" OD Class E PVC
Lifting eyes	No
Max. storage capacity	165 litres
Chamber material	Tank-grade HDPE
Dimensions (Ø x H)	750 x 1000 mm
Clear opening	450 x 450 mm

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice. Tricel (Killarney) Unlimited Company trading as Tricel.