



STORMWATER SOLUTIONS / STORAGE / CHAMBERS

NeroStor®

Tricel offers four sizes of high-performance NeroStor® stormwater chambers designed for site-specific applications such as parking lots, roadways and commercial developments. NeroStor chambers provide an environmentally sustainable underground water management system that optimises groundwater recharge and saves valuable land resources. Our four storm chamber models are designed to fit almost any type of performance specifications, project footprint and construction budget.



	NS8	NS5	NS2	NS1
Installed Storage Capacity*	4.66 m ³ /chamber	5.0 m ³ /chamber	2.12 m ³ /chamber	0.88 m ³ /chamber
Height	1,511 mm	1,156 mm	754 mm	406 mm
Width	2,554 mm	1,976 mm	1,300 mm	864 mm
Unit Length	1,317 mm	2,253 mm	2,210 mm	2,220 mm
Installed Length	1,227 mm	2,167 mm	2,160 mm	2,170 mm
Weight	56.7 kg	57.6 kg	31 kg	15 kg
Chambers/Pallet	10	19	33	90
Material	Polypropylene	Polypropylene	Polypropylene	Polypropylene
Mfg. Process	Injection Molding	Injection Molding	Injection Molding	Injection Molding
Special Features	Integrated Handle	Integrated Handle	Integrated Handles	Low Profile Chamber
ASTM Standards	Meets or Exceeds	Meets or Exceeds	Meets or Exceeds	Meets or Exceeds

* Assuming 40% void volume of backfill with 230 mm bedding & 300 mm cover for NS8 and NS5, and 150 mm bedding & 150mm cover for NS2 and NS1

Performance

- High performance polypropylene material
- Meets or exceeds **ASTM F2418** product standard & **ASTM F2787** design standard
- Meets **AASHTO H20** live load & **HL93** design load requirements
- Advanced injection molding technology for maximum structural performance


System Design

- Maximum land utilization & minimal environmental impact
- Available as part of a complete solution with end caps, pipe manifolds & pretreatment options


Handling

- Integrated Handles for safe on-site handling
- Sturdy and lightweight for safe transport and placement by 2 people
- Specially designed pallet for trouble free handling
- Maximum stacking density to reduce on-site staging footprint

Integrated Handles



Easy to Handle




Reinforced Pallet*



* minimum 1.82 m forks required

Installation Specifications

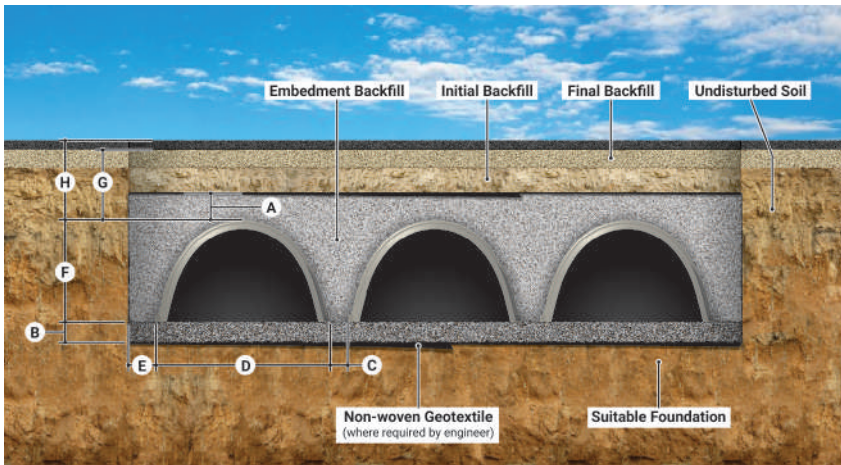

	NS8	NS5	NS2	NS1
A minimum backfill above chamber	300 mm	300 mm	150 mm	150 mm
B minimum bedding	230 mm	230 mm	150 mm	150 mm
C chamber spacing	216 mm	130 mm	150 mm	150 mm
D chamber width	2,554 mm	1,976 mm	1,300 mm	864 mm
E backfill at edge of system	300 mm	300 mm	300 mm	300 mm
F chamber height	1,511 mm	1,156 mm	754 mm	406 mm
G minimum cover	600 mm	450 mm	450 mm	450 mm
H maximum burial depth	2.44 m	2.44 m	2.44 m	2.44 m

COLLECTION & CONVEYANCE



GOLDFLO®
AASHTO Dual-Wall Pipe



GOLDPRO STORM®
Dual-Wall HP Polypropylene

TREATMENT




STORMWATER QUALITY
Engineered Water Treatment

STORAGE



NEROSTOR®
Arched Chambers



UNDERGROUND DETENTION
Customized Pipe Systems