

METER BOXES

BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER



Works with
Tricel and
Mitras **Mark 2**
Recessed Gas
Meter Boxes

GRP OVERBOX for Mark 2 Recessed Gas Box

GRP Overbox and Door to suit damaged recessed meter boxes. This GRP Overbox (Door frame kit) comes with a tapered back to fit standard Irish and UK Mark 2 Recessed Gas meter boxes. Suitable for wall mounting.

COMPLIANT TO BS 8499: 2017
STOCK CODE: 105141



TRICEL
GENERATIONS OF INNOVATION

STOCK CODE:
105141

GRP OVERBOX


for Mark 2 Recessed Gas Box

COMPLIANT TO BS 8499: 2017

**METER
BOXES**
BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER

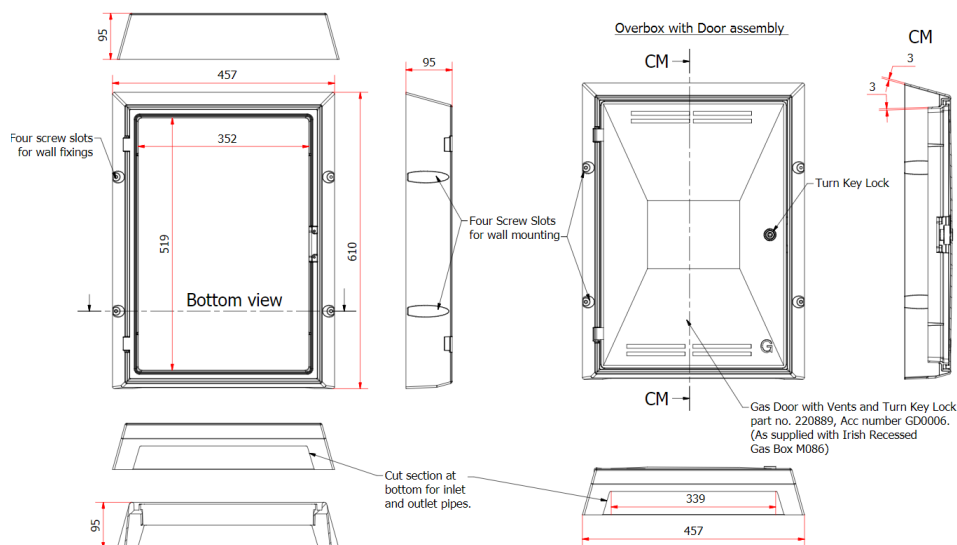

Dimensions of GRP GAS Overbox

610mm high x 457mm wide x 95mm deep.
Internal dimensions = 519mm high x 352mm wide*

SPECIFICATION & KEY FEATURES

- GRP Overbox, repair solution for damaged Mark 3 Recessed Gas Meter Boxes.
- Meets the requirements of British Standard BS 8499 : 2017.
- Constructed from SMC / GRP – Glass Reinforced Polymer.
- Will not corrode, weather resistant.
- Easily cleaned.
- Hinges on left.
- Suitable for buildings with red bricks.

INSTALLATION

Step 1: Ensure that the GRP Overbox that you want to fit is the correct one for the box on the wall.

The Damaged Box on the wall should be approximately:

- Height = 595mm to 600mm
- Width = 410mm to 412mm
- Depth (outside of box to wall) = 70mm to 75mm

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. – Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.
Tel: +44 1453 791616 | Email: constructionsales@tricel.co.uk | www.tricel.co.uk

STOCK CODE:
105141

GRP OVERBOX

for Mark 2 Recessed Gas Box

COMPLIANT TO BS 8499: 2017

METER BOXES

BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER



STEP 2

Step 2: Remove the existing door, clean the box architrave and inspect for damage. Any damage (holes or cracks) should be filled using a 4-hour Fire Retardant Silicone to ensure that water does not enter the cabinet.

Step 3: After unpacking the GRP Overbox, remove the door. This can be done by depressing the brass insert hinge with a narrow screwdriver.




STEP 4



STEP 5

Step 4: Place the GRP Overbox over the damaged box on the wall. Ensure that you have a good fit (incorrect installation of the box on the wall may hinder this).

Step 5: Mark the holes on the wall from the overbox fitting holes.



STEP 6

Step 6: Drill holes using M6 Drill bit at a depth of 30mm.



STEP 7

Step 7: Insert supplied wall plugs into the wall.

* Approximate dimensions.
In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.
Tel: +44 1453 791616 | Email: constructionsales@tricel.co.uk | www.tricel.co.uk

STOCK CODE:
105141

GRP OVERBOX

for Mark 2 Recessed Gas Box

COMPLIANT TO BS 8499: 2017

**METER
BOXES**
BY TRICEL



UK'S LEADING
DESIGNER & MANUFACTURER



STEP 8



STEP 9

Step 8: Align the overbox to the holes drilled on wall, and fix to the wall using supplied M5x30mm screws.

Step 9: Close the door and test the fit.

Step 10: You may need to seal the architrave to the wall to fill in gaps. Only FR200 4-Hour Fire Retardant Silicone is recommended.

ASSOCIATED PRODUCTS



SPARE KEY
(170000)



4-HOUR FIRE RETARDANT SILICONE
(106164)

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.
Tel: +44 1453 791616 | Email: constructionsales@tricel.co.uk | www.tricel.co.uk