METER BOXES

BY TRICEL

UK'S LEADING
DESIGNER & MANUFACTURER

Achilles UVDB SILVER PLUS CERTIFIED



GRP ELECTRIC ARCHITRAVE OVERBOX

SUITABLE FOR TRICEL/MEDIUM PERMALI AND WAVIN BOXES

STOCK CODE: **EB0025**

TRICEL
GENERATIONS OF INNOVATION


STOCK CODE:
EB0025

GRP ARCHITRAVE OVERBOX

SUITABLE FOR TRICEL/MEDIUM PERMALI AND WAVIN BOXES

METER BOXES BY TRICEL

UK'S LEADING DESIGNER & MANUFACTURER

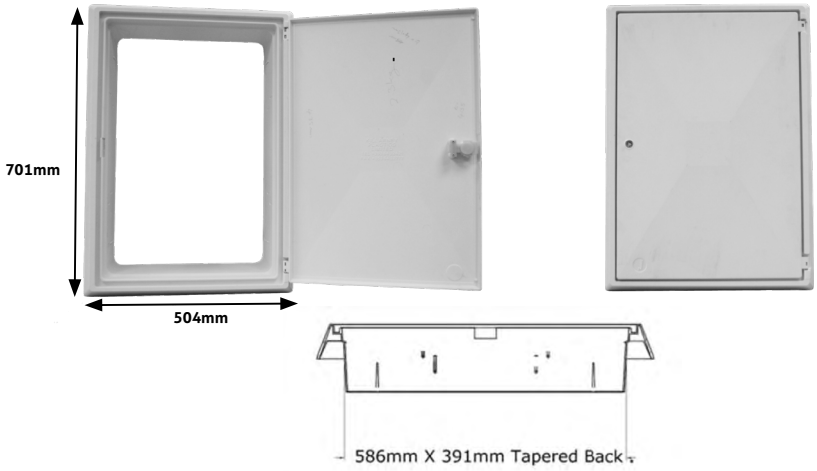

DIMENSIONS

701mm high x 504mm wide.

The GRP Architrave overbox contains the following:
1 x frame, 1 x door, 1 x 310mm Silicone, 1 x short reach key,
4 x 3/4'' screws & 1 x carton

INSTRUCTIONS

1. Clean the inside of the frame of existing meter box with a cloth. **See fig 1.**
2. Apply Silicone around the frame of the GRP Architrave Overbox. Put the nozzle of the cartridge touching the architrave edge. Apply a thick bead of silicone. **See fig 2.**
3. Apply a thick bead of Silicone in the top and bottom corners. **See fig 3.**
4. Slide the GRP Architrave Overbox in place into the existing meter box (Check that the GRP Architrave Overbox is in its correct orientation). **See fig 4.**
5. Drill 4 holes with a diameter 3.5mm drill bit in the moulded slots. **See fig 5.**
6. Secure the GRP Architrave Overbox in place with self-tapping screws. **See fig 6.**
7. Attach the meter box door to the GRP Architrave Overbox and close. **See fig 7**



Achilles UVDB SILVER PLUS CERTIFIED

TRICEL GENERATIONS OF INNOVATION

* Approximate dimensions.
In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

Tricel (Gloucester) Ltd. - Fox House, Stonedale Road, Stonehouse, Gloucestershire, GL10 3SA, United Kingdom.
Tel: +44 1453 791616 | **Email:** constructionsales@tricel.co.uk | **www.tricel.co.uk**

220903-1073773/5-MAR2025